

Euro metal door for external or internal installation in public buildings and industrial premises, private houses and flats

Door leaf

Thickness	63 mm
Sheet thickness	1,5 mm
Rebate	15 mm
Filling	Stone wool
Finish	Powdercoating
In one level with the frame	
Rubber sealing around the perimeter	

Frame

Thickness	110 mm
-----------	--------

Properties


Resistance to Wind Load	C3
Water tightness	4A/6B
Air permeability, class	3-4
Acoustic performance R_w , db	42
Thermal isolation	2.0
Opening	C4

Size range



Max	
Height	3000 mm
Single door width	1200 mm
Double door width	2800 mm
Most Common Sizes	
1000 mm x 2100 mm	
1500 mm x 2100 mm	
2000 mm x 2100 mm	

Additional

Glazing
 Grills
 Adjufix Fixings
 Stainless steel threshold
 Galvanizing
 Drop-down seal
 Drip profile

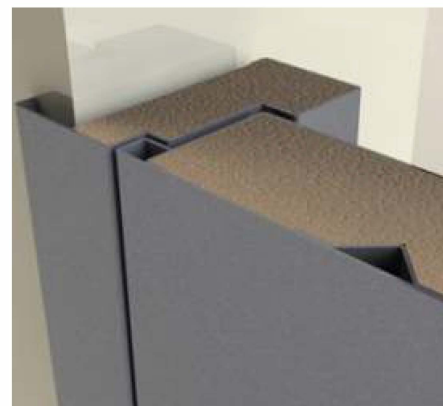


Doorset sections

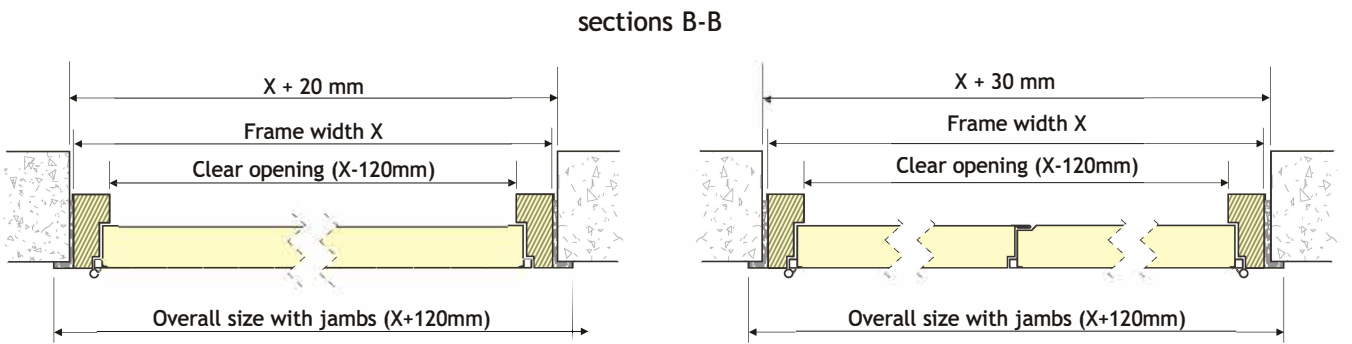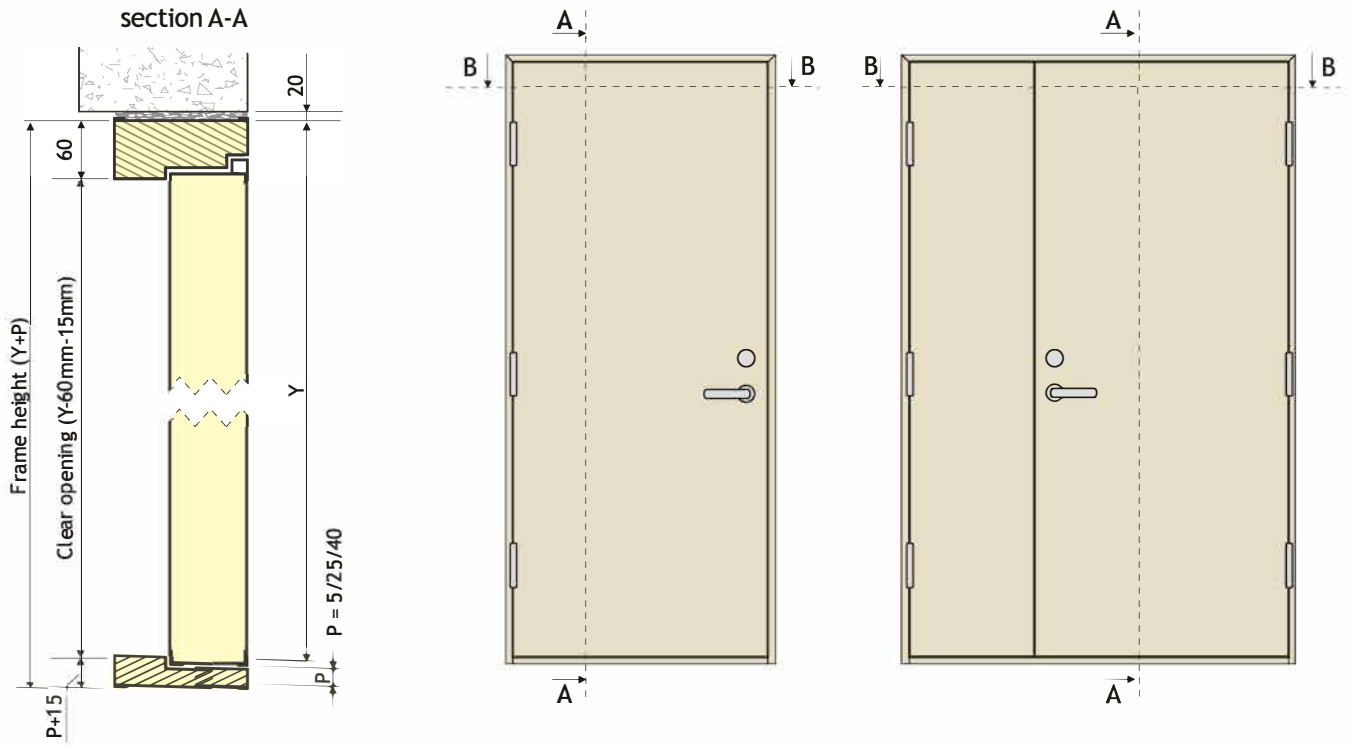


Single leaf

Double leaf


Door designs

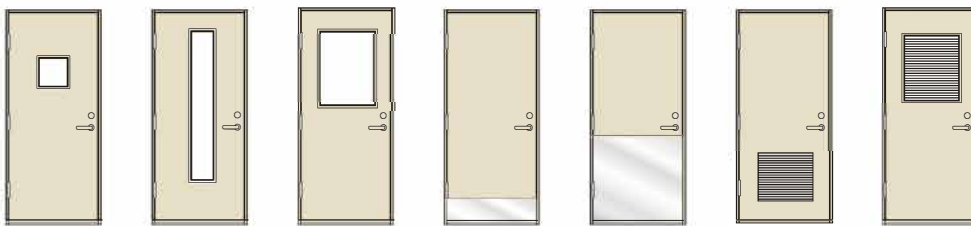


Handing chart

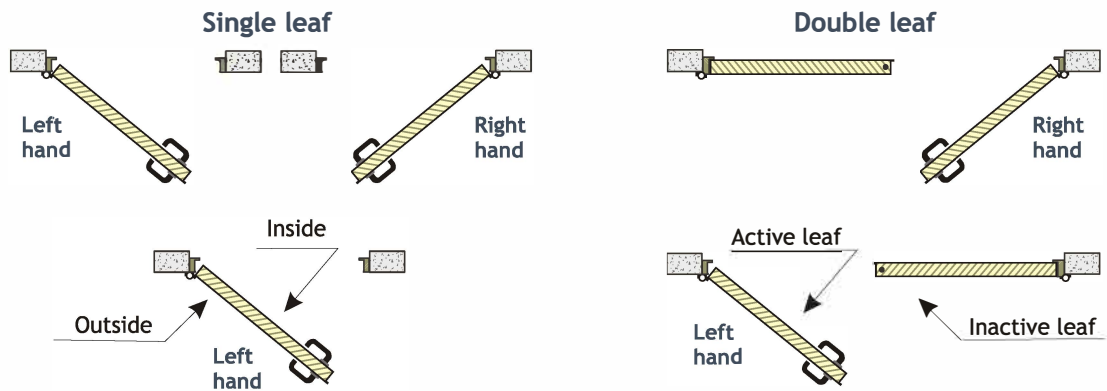

Jambs types

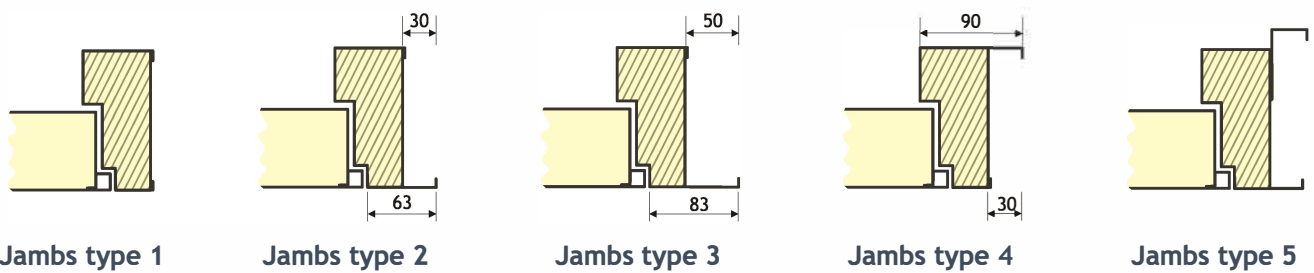

Frame types

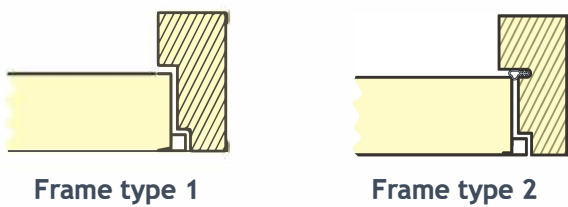

Thresholds

